


REV	ECN NO.	NATURE OF MODIFICATION	CN/DATE
1	A	First issued	2019-07-24
2	B	Add dimension	2019-08-09
3	C	Add backlight cable	2019-10-29
4	D	Cancel backlight cable	2021-02-19

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

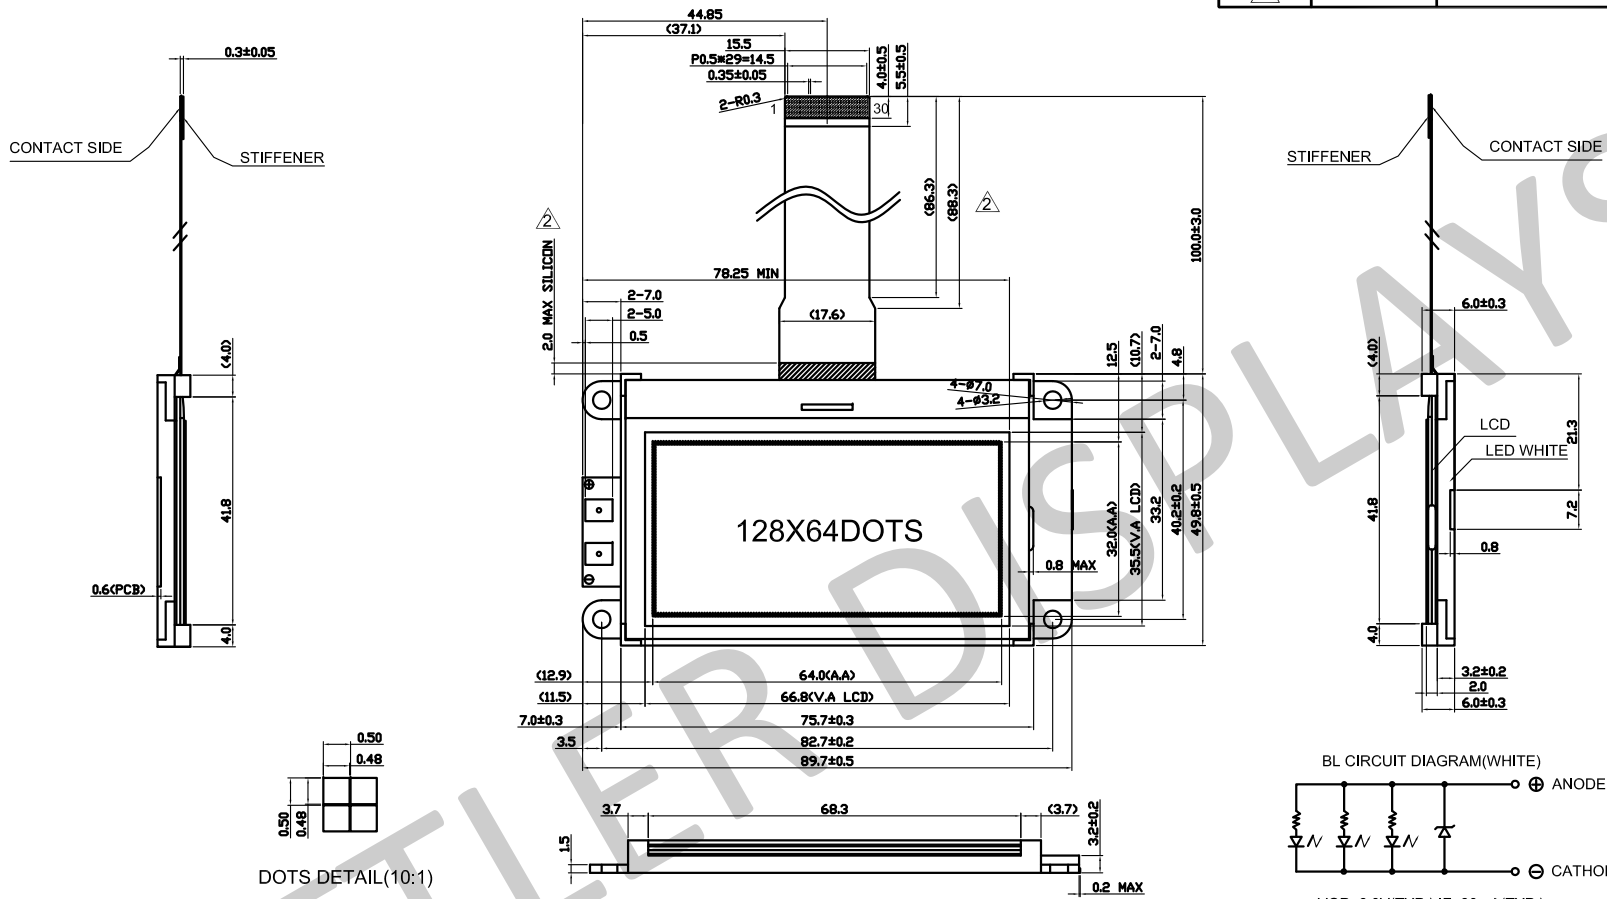

30	IRS
29	P/S
28	C86
27	VR
26	V5
25	V4
24	V3
23	V2
22	V1
21	CAP2+
20	CAP2-
19	CAP1-
18	CAP1+
17	CAP3-
16	VOUT
15	GND
14	VDD
13	D7
12	D6
11	D5
10	D4
9	D3
8	D2
7	D1
6	D0
5	RD
4	WR
3	A0
2	RES
1	CST
PIN NO.	SYMBOL

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	3.0V	OPERATING TEMP	-20°C~70°C
OPERATING CURRENT	--	STORAGE TEMP	-30°C~85°C
LCD DRIVE VOLTAGE	8.9V	POLARIZER TYPE	FRONT:TRANSMISSIVE
DISPLAY MODE	STN(BLUE)/NEGATIVE/TRANSMISSIVE	BACKLIGHT	LED-SIDE WHITE,VF=6.0V
LCD DRIVE METHOD	1/65 DUTY, 1/9 BIAS	ROHS STANDARD	YES
LCD DRIVE IC	ST7565P	OTHER	--
VIEW DIRECTION	6:00 O'CLOCK		

UNIT	TOLERANCE
MM	X.X = ±0.3
3RD ANGLE	X.XX = ±0.30
	ANG = -
SCALE:	1:1
DRAWN:	Jacky
CHECKED:	
APPROVED:	

<b>AZ DISPLAYS</b>	
TITLE: LCM	
MODEL NO: AQM1264PB-NLW-BBW	REV D
PART NO: --	SH NO 1/1