


EI35-2.5VA TRANSFORMER AH300XX SERIES

FEATURES,

- UL5015-1,-3 Approved: UL File No.E177998
- Class B Insulation System
- Split bobbin Design
- Dielectric Strength 2500Vrms
- Optional Single 115V or Dual 115/230V Primaries at 50/60Hz
- Standard Dual Secondaries
- 5 Standard Sizes for a Variety of Power Application

OUTLINE DIMENSIONS

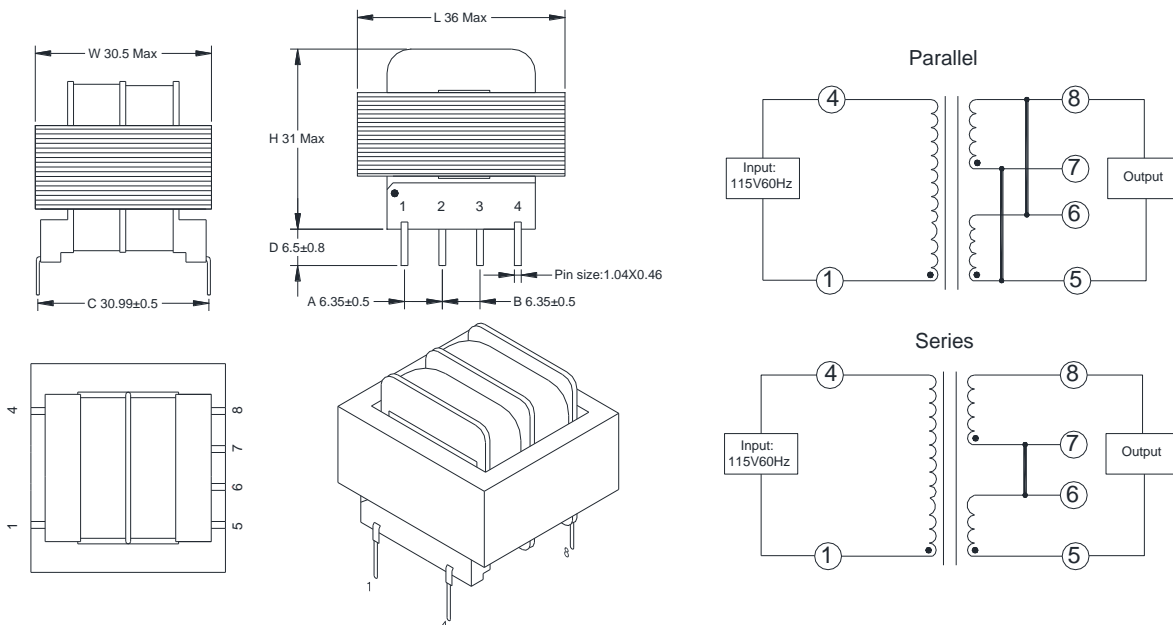

ELECTRONIC SPECIFICATIONS

Part NO	Input Voltage (Vac)	Series		Parallel		Rated Power (VA)	Certificate	
		Voltage (Vac)	Current (mA)	Voltage (Vac)	Current (mA)		UL	CE
AH30010	115V	10	250	5	500	2.5VA	•	
AH30012	115V	12.6	200	6.3	400	2.5VA	•	
AH30016	115V	16	150	8	300	2.5VA	•	
AH30020	115V	20	125	10	250	2.5VA	•	
AH30024	115V	24	100	12	200	2.5VA	•	
AH30028	115V	28	85	14	170	2.5VA	•	
AH30036	115V	36	65	18	130	2.5VA	•	
AH30048	115V	48	50	24	100	2.5VA	•	
AH30056	115V	56	45	28	90	2.5VA	•	
AH300120	115V	120	20	60	40	2.5VA	•	