


EI41-6.0VA TRANSFORMER AH400XX SERIES

FEATURES,

- UL5015-1,-3 Approved: UL File No.E177998
- Class B Insulation System
- Split bobbin Design
- Dielectric Strength 2500Vrms
- Optional Single 115V or Dual 115/230V Primaries at 50/60Hz
- Standard Dual Secondaries
- 5 Standard Sizes for a Variety of Power Application

OUTLINE DIMENSIONS

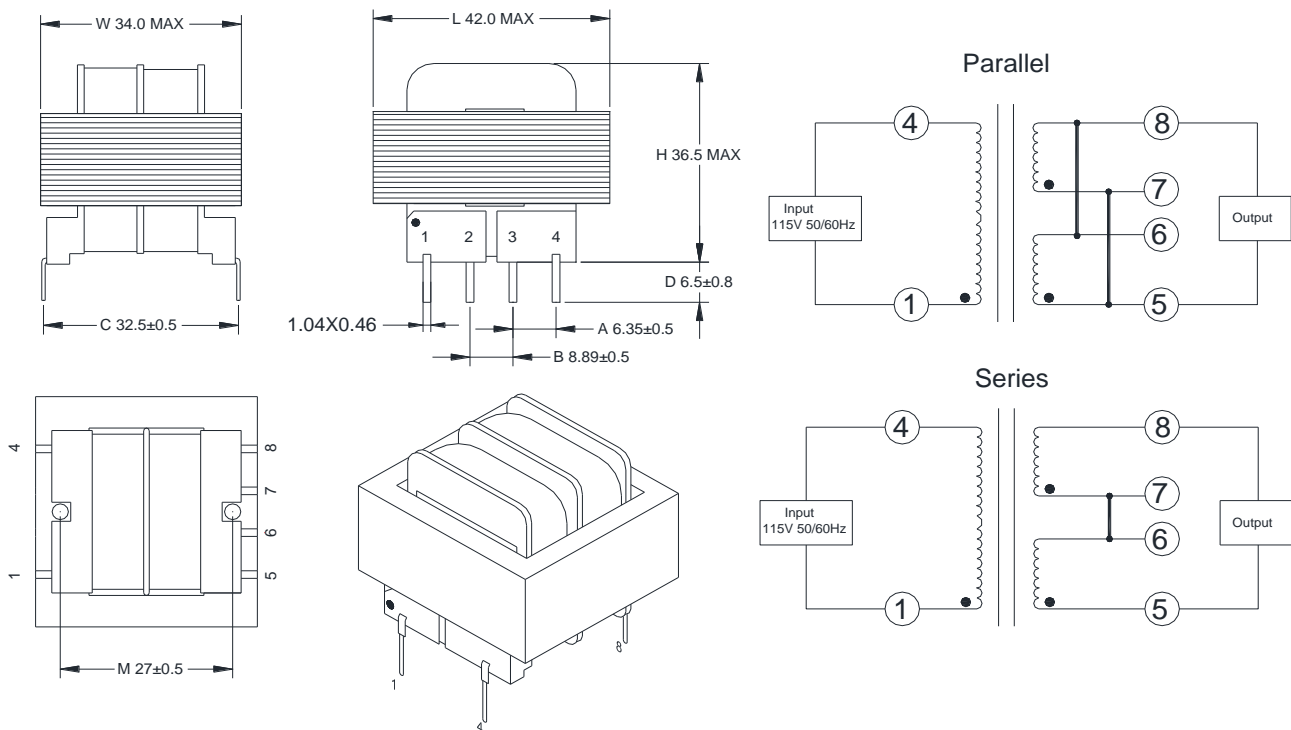

ELECTRONIC SPECIFICATIONS

Part NO	Input Voltage (Vac)	Series		Parallel		Rated Power (VA)	Certificate	
		Voltage (Vac)	Current (mA)	Voltage (Vac)	Current (mA)		UL	CE
AH40010	115V	10	600	5	1200	6.0VA	•	
AH40012	115V	12.6	500	6.3	1000	6.0VA	•	
AH40016	115V	16	400	8	800	6.0VA	•	
AH40020	115V	20	300	10	600	6.0VA	•	
AH40024	115V	24	250	12	500	6.0VA	•	
AH40028	115V	28	200	14	400	6.0VA	•	
AH40036	115V	36	170	18	340	6.0VA	•	
AH40048	115V	48	125	24	250	6.0VA	•	
AH40056	115V	56	110	28	220	6.0VA	•	
AH400120	115V	120	50	60	100	6.0VA	•	