


EI48-12VA TRANSFORMER AH500 SERIES

FEATURES,

- UL5015-1,-3 Approved:UL File No.E177998
- Class B Insulation System
- Split bobbin Design
- Dielectric Strength 2500Vrms
- Optional Single 115V or Dual 115/230V Primaries at 50/60Hz
- Standard Dual Secondaries
- 5 Standard Sizes for a Variety of Power Application

OUTLINE DIMENSIONS

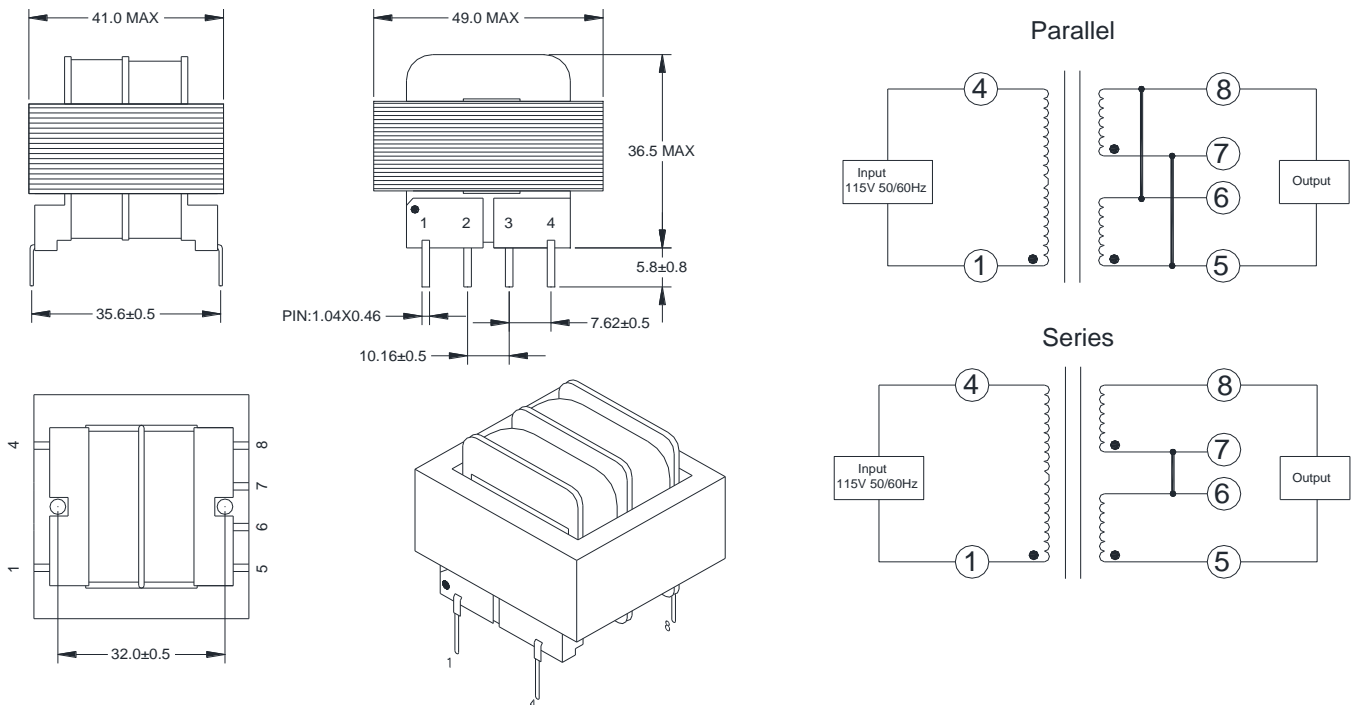

ELECTRONIC SPECIFICATIONS

Part NO	Input Voltage (Vac)	Series		Parallel		Rated Power (VA)	Certificate	
		Voltage (Vac)	Current (mA)	Voltage (Vac)	Current (mA)		UL	CE
AH50010	115V	10	1200	5	2400	12.0VA	•	
AH50012	115V	12.6	1000	6.3	2000	12.0VA	•	
AH50016	115V	16	800	8	1600	12.0VA	•	
AH50020	115V	20	600	10	1200	12.0VA	•	
AH50024	115V	24	500	12	1000	12.0VA	•	
AH50028	115V	28	420	14	840	12.0VA	•	
AH50036	115V	36	350	18	700	12.0VA	•	
AH50048	115V	48	250	24	500	12.0VA	•	
AH50056	115V	56	220	28	440	12.0VA	•	
AH500120	115V	120	100	60	200	12.0VA	•	