

AZDC007

50 AMP MINIATURE POWER RELAY

FEATURES

- 50 Amp switching capability
- Contact gap: 1.8mm
- Dielectric strength 4.5 kV_{RMS}
- 10kV Surge
- UL class F insulation
- CQC: 21002295387
- UL/TUV: Pending



CONTACTS

| | |
|---|---|
| Arrangement | SPST-N.O. (1 Form A) |
| Ratings (max.) switched power switched current continuous current switched voltage | (resistive load) 3250 W 50 A 50 A 65 VDC |
| Rated Loads UL/CUR/TÜV/CQC | 35 A at 65 VDC, resistive, 105°C, 6k cycles 50 A at 65 VDC, resistive, 85°C, 6k cycles |
| Contact material | AgSnO ₂ (silver tin oxide) |
| Contact gap | 1.8 mm |
| Contact resistance initial typical | (load contact) ≤ 100 mΩ < 3 mΩ |

COIL

| | |
|--|---|
| Nominal coil DC voltages | 5, 9, 12, 18, 24, 48, 60 |
| Dropout voltage | > 5% of nominal coil voltage |
| Holding voltage | > 35% of nominal coil voltage |
| Coil power nominal holding power at pickup voltage | (at 23 °C) 1.6 W 196 mW 900 mW |
| Temperature Rise | 70 K (126°F) at nom. coil voltage, 85°C |
| Max. temperature | Class F insulation - 155°C (311°F) |

GENERAL DATA

| | |
|---|--|
| Life Expectancy mechanical electrical | (minimum operations) 1 x 10 ⁵ see UL/CUR/TÜV/CQC ratings |
| Operate Time | 20 ms (max.) at nominal coil voltage |
| Release Time | 10 ms (max.) at nominal coil voltage, without coil suppression |
| Dielectric Strength coil to load contacts open load contacts | (at sea level for 1 min.) 4500 V _{RMS} 2500 V _{RMS} |
| Surge Voltage | 10kV @1.2/50µs (coil to contacts) |
| Insulation Resistance | 1000 MΩ (min.) at 23°C, 500 VDC, 50% RH |
| Temperature Range operating | (at nominal coil voltage) -40°C (-40°F) to 105°C (221°F) @ 35A -40°C (-40°F) to 85°C (185°F) @ 50A |
| Vibration resistance | 0.062" (1.5 mm) DA at 10–55 Hz |
| Shock | 20 g |
| Enclosure protection category material group flammability | P.B.T. polyester RT II, flux proof IIla UL94 V-0 |
| Terminals | Tinned copper alloy, P. C. |
| Soldering max. temperature max. time | 270 °C 5 s |
| Dimensions length width height | 33.4 mm (1.31") 15.9 mm (0.63") 25.15 mm (0.99") |
| Weight | 25 grams (approx.) |
| Compliance | UL 508, IEC 61810-1, RoHS, REACH |
| Packing unit in pcs | 50 per plastic tray / 400 per carton box |

ZETTLER


AZDC007

COIL VOLTAGE SPECIFICATIONS

| Nominal Coil VDC | Must Operate VDC | Min. Holding VDC | Max. Cont. VDC | Resistance Ohm \pm 10% |
|------------------|------------------|------------------|----------------|--------------------------|
| 5 | 3.75 | 1.75 | 6.0 | 15.5 |
| 9 | 6.75 | 3.15 | 10.8 | 50.5 |
| 12 | 9.0 | 4.2 | 14.4 | 90.0 |
| 18 | 13.5 | 6.3 | 21.6 | 202.5 |
| 24 | 18.0 | 8.4 | 28.8 | 360.0 |
| 48 | 36.0 | 16.8 | 57.6 | 1440.0 |
| 60 | 45.0 | 21.0 | 72.0 | 2250.0 |

Note: All values at 23°C (73°F), upright position, terminals downward.

ORDERING DATA

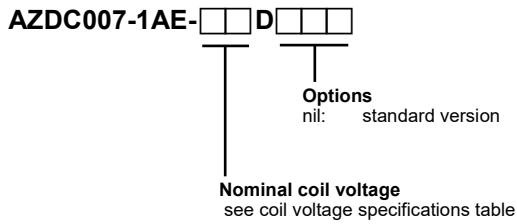


Example ordering data

AZDC007-1AE-24D 24 VDC nominal coil voltage, 1.8 mm contact gap


MECHANICAL DATA

Dimensions in mm. Tolerance: \pm 0.3mm

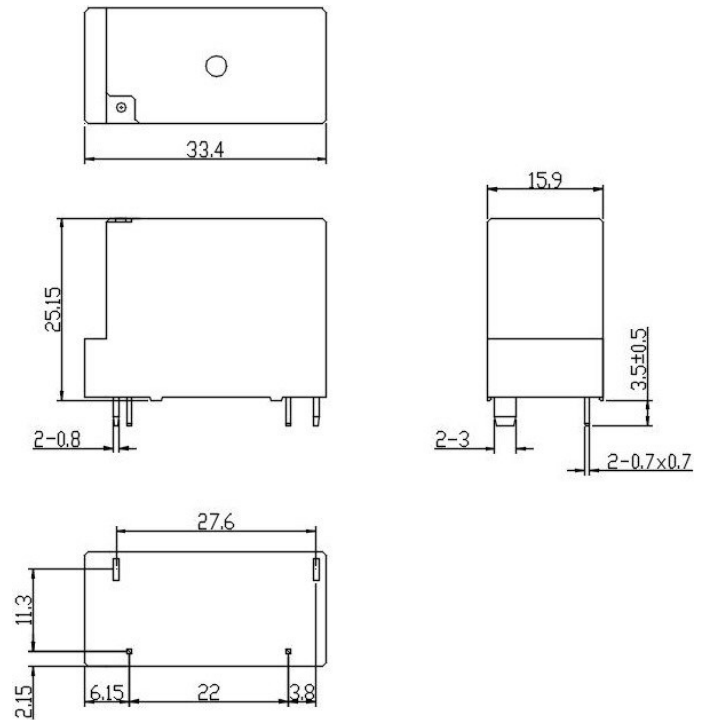


WIRING DIAGRAMS

Viewed towards terminals

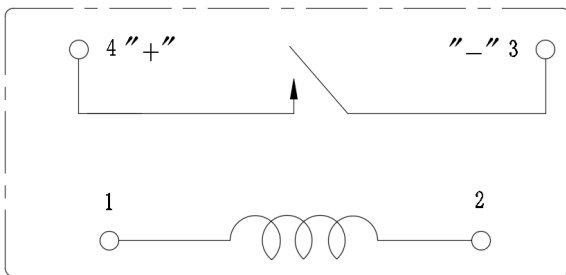

PC BOARD LAYOUT

Viewed towards terminals. Dimensions in mm.

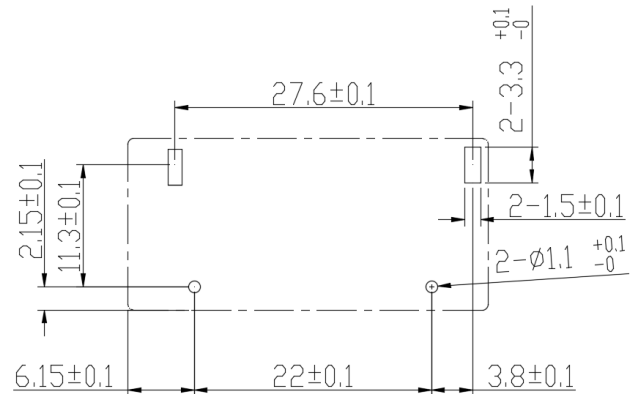

NOTES

1. All values at 23°C (73°F).
2. Relay may pull in with less than "Must Operate" value.
3. Provide sufficient PCB cross section as heat spreader on terminals.
4. Specifications subject to change without notice.

AZDC007

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit zettler-group.com. For support on this product or other ZETTLER relays, please visit one of the group sites below.

SITES FOR ZETTLER RELAYS

NORTH AMERICA

American Zettler, Inc.
www.azettler.com
sales@azettler.com

EUROPE

Zettler Electronics, GmbH
www.zettlerelectronics.com
office@zettlerelectronics.com

Zettler Electronics, Poland
www.zettlerelectronics.pl
office@zettlerelectronics.pl

CHINA

Zettler Group, China
www.zettlercn.com
relay@zettlercn.com

ASIA PACIFIC

Zettler Electronics (HK) Ltd.
www.zettlerhk.com
sales@zettlerhk.com



ZETTLER

www.ZETTLER-group.com

page 3 of 3

2021-5-6