


EI57-20VA TRANSFORMER AH600XX SERIES

FEATURES,

- UL5015-1,-3 Approved: UL File No.E177998
- Class B Insulation System
- Split bobbin Design
- Dielectric Strength 2500Vrms
- Optional Single 115V or Dual 115/230V Primaries at 50/60Hz
- Standard Dual Secondaries
- 5 Standard Sizes for a Variety of Power Application

OUTLINE DIMENSIONS

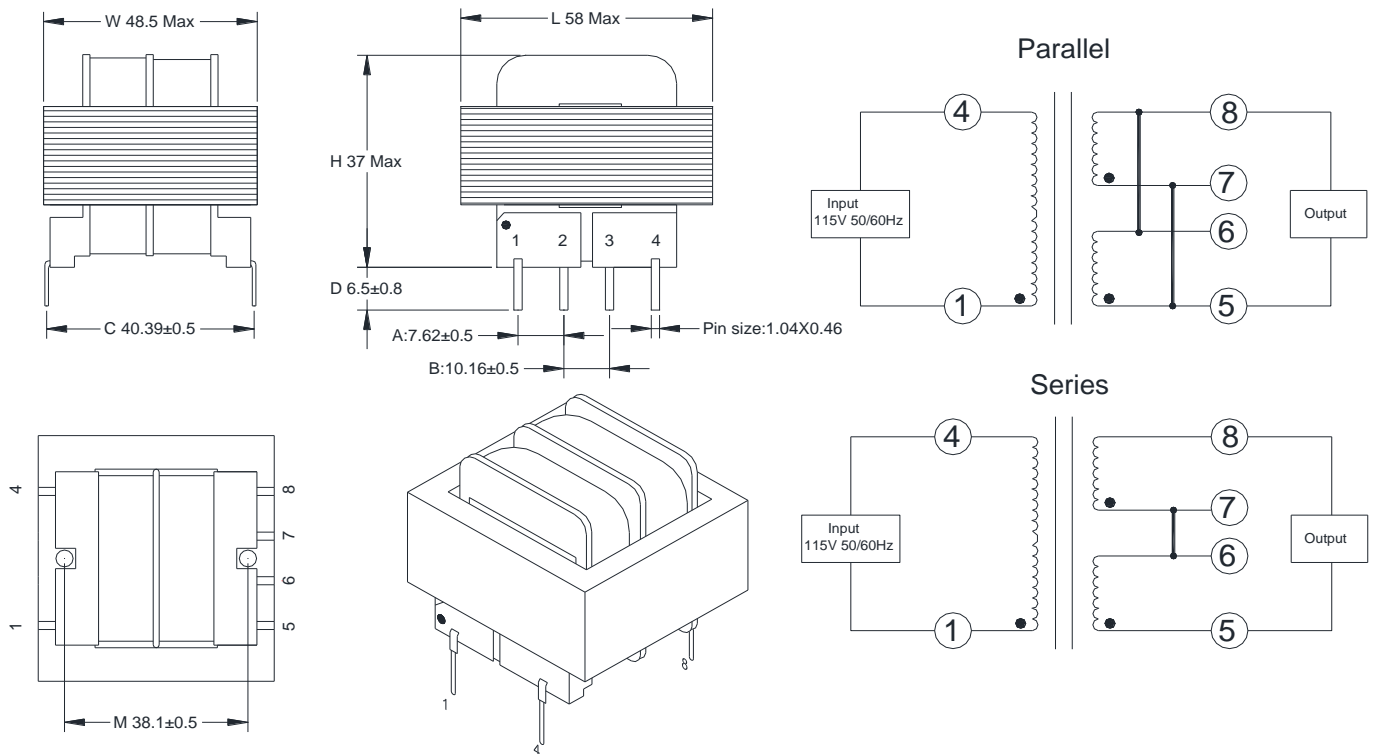

ELECTRONIC SPECIFICATIONS

Part NO	Input Voltage (V)	Series		Parallel		Rated Power (VA)	Certificate	
		Voltage (Vac)	Current (mA)	Voltage (Vac)	Current (mA)		UL	CE
AH60010	115V	10	2000	5	4000	20.0VA	•	
AH60012	115V	12.6	1600	6.3	3200	20.0VA	•	
AH60016	115V	16	1250	8	2500	20.0VA	•	
AH60020	115V	20	1000	10	2000	20.0VA	•	
AH60024	115V	24	800	12	1600	20.0VA	•	
AH60028	115V	28	700	14	1400	20.0VA	•	
AH60036	115V	36	550	18	1100	20.0VA	•	
AH60048	115V	48	400	24	800	20.0VA	•	
AH60056	115V	56	357	28	714	20.0VA	•	
AH600120	115V	120	160	60	320	20.0VA	•	