


## 2.5VA UI28 TRANSFORMER AHF02XXX SERIES

### FEATURES,

- UL 5085-1,-3 Approved: UL File No.E177998
- Dielectric Strength 2500Vrms
- Dual 115V/230V Primaries
- Dual Secondaries
- Class B Insulation System
- 3 Standard Sizes for a Variety of Power Application

### OUTLINE DIMENSIONS

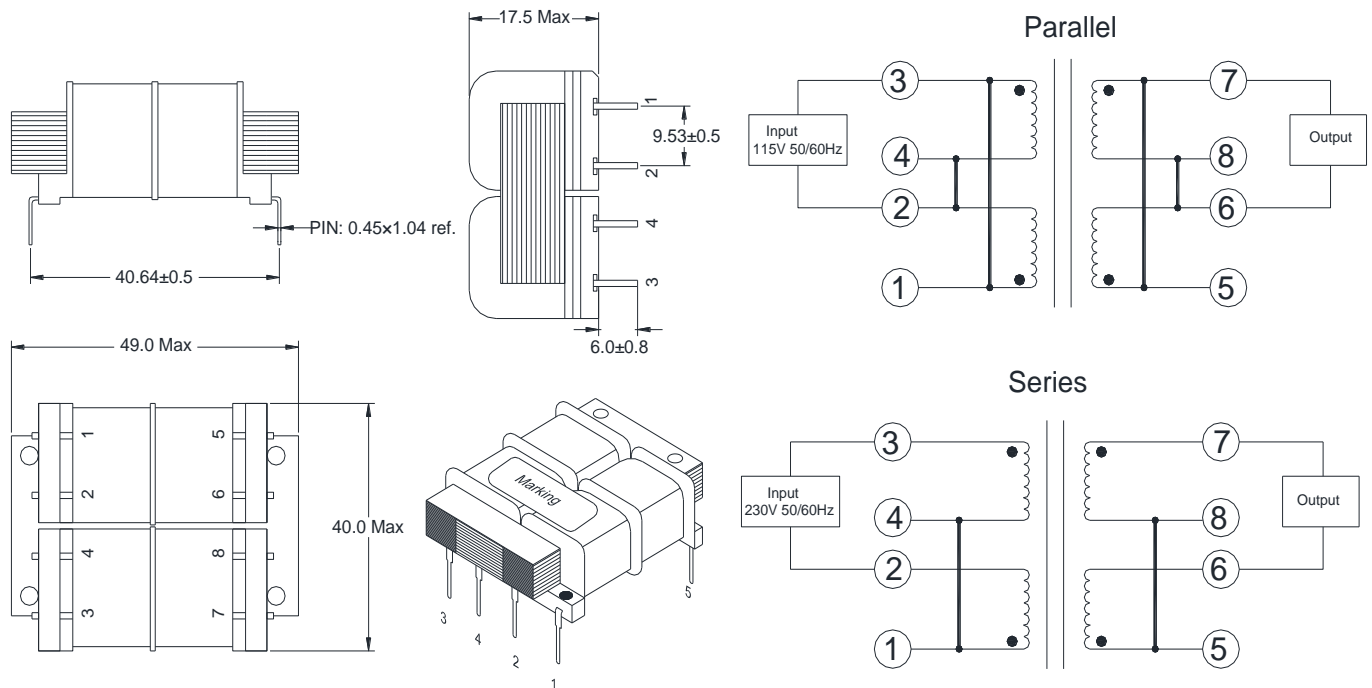

### ELECTRONIC SPECIFICATIONS

Part NO	Input Voltage (Vac)	Series		Parallel		Rated Power (VA)	Certificate	
		Voltage (Vac)	Current (mA)	Voltage (Vac)	Current (mA)		UL	CE
AHF02010	115V/230V	10	250	5	500	2.5VA	•	
AHF02012	115V/230V	12.6	200	6.3	400	2.5VA	•	
AHF02016	115V/230V	16	150	8	300	2.5VA	•	
AHF02020	115V/230V	20	125	10	250	2.5VA	•	
AHF02024	115V/230V	24	100	12	200	2.5VA	•	
AHF02030	115V/230V	30	85	15	170	2.5VA	•	
AHF02034	115V/230V	34	75	17	150	2.5VA	•	
AHF02040	115V/230V	40	60	20	120	2.5VA	•	
AHF02056	115V/230V	56	45	28	90	2.5VA	•	
AHF02088	115V/230V	88	28	44	56	2.5VA	•	
AHF02120	115V/230V	120	20	60	40	2.5VA	•	
AHF02230	115V/230V	230	10	115	20	2.5VA	•	